




## ALUMINIUM I BEAM SECTION

**AA6061T6 / AA6082 T6**

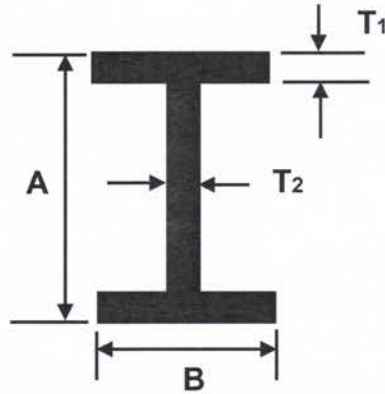

Thickness (T <sub>1</sub> ) mm	Width (B) mm	Thickness (T <sub>2</sub> ) mm	Height (A) mm
4.00	50.00	4.00	108.00
4.00	50.00	6.50	140.00
6.50	50.00	4.00	140.00
5.33	76.20	5.33	127.00
10.20	90.60	5.20	202.10
7.82	133.40	5.84	203.20
6.00	60.00	4.00	202.00
6.00	76.20	6.00	88.90
6.00	76.20	4.00	232.00
6.00	80.00	4.00	232.00
7.94	76.20	6.35	101.60
10.00	76.20	6.35	152.40
8.00	76.20	6.00	152.40
6.35	80.00	4.75	130.00
8.00	76.20	6.00	152.40
6.83	152.40	6.10	152.40
6.86	108.25	13.51	203.20
7.00	100.00	6.00	280.00
10.40	76.20	7.15	203.20
8.00	50.00	5.00	140.00
8.00	63.50	8.00	76.20
10.00	76.20	8.00	150.00
8.00	80.00	5.00	176.00
15.75	177.80	7.87	304.80

\* available length: 4876.8mm; 6000mm; 6096mm

